

Scotle SUP32C Air-Cooled Single-Wobble Laser Cleaning Machine Manual



Shenzhen Scotle Technology Group Limited
No.14, 2F, Building Y1, Bantian Street Creative Park, Longgang District,
Shenzhen, Guangdong, 518129 China
www.scotle.com

Contents

1. Product Description	1
1.1. Overall display	1
1.2. Packing list	3
2. Safety Instructions	4
2.1. precautions	4
2.2. Product safety warning label	5
2.3. Product nameplate	6
2.4. European Union Agent Information	7
2.5. Compliance to Standards for CE Marking	7
3. Technical parameters	8
3.1. Machine parameter details	8
3.2. Laser source parameter details	9
3.3. Cleaning efficiency	9
4. Installation & Operation	10
4.1. Installation	10
4.2. Operation	11
4.2.1. Operation steps	11
4.2.2. After cleaning is completed	13
5. System interface	13
5.1. System interface description	13
5.2. Process Page	14
5.3. Settings Page	15
5.4. Monitoring Page	17
5.5. Diagnostic Page	18
5.6. Alarm Prompt Page	20
6. Maintenance and upkeep	21
6.1. Regular cleaning	21
6.2. Cooling system inspection	21
6.3. Warning	21
6.4. Maintenance of optical components	21
6.5. Lubrication and Maintenance	22
7. Fault resolution	22
8. Q&A	23

1. Product Description

1.1. Overall display

Overview of Laser Cleaning Machine:

Laser cleaning machine is a device that uses laser technology to remove surface pollutants. By irradiating the surface of the workpiece with a high-energy laser beam, dirt, rust, or coating can be instantly vaporized or peeled off, achieving a cleaning effect. Compared with traditional cleaning methods, laser cleaning machines have the characteristics of easy operation, easy automation, no need for chemical reagents, adaptability to surface cleaning, high cleanliness, high precision, and are efficient, environmentally friendly, safe and reliable, with minimal damage to the substrate surface.





1.2. Packing list

Packing List



Laser Cleaning Head



Protective Glasses



5x Protective Lens



1x Collimating lens
1x Focusing lens



Keys



Air Inlet Tube



Power Cord






2. Safety Instructions

2.1. precautions

When using a laser cleaning machine, in order to ensure the safety of operators and equipment, the following safety precautions must be strictly followed:

1. Equip with protective equipment: Operators must wear complete protective equipment, including dust masks, laser protective goggles, laser protective face shields, laser protective clothing, and safety shoes, to ensure that their skin is not directly exposed.
2. Avoid direct viewing of the laser: During operation, it is strictly prohibited to directly view the laser beam to prevent permanent damage to the eyes.
3. Set up laser protection measures: The laser cleaning operation area should be isolated using laser protective curtains or partitions, and laser radiation warning signs should be posted. Personnel who are not wearing protective equipment are prohibited from entering the area.
4. Keep the work environment clean: Flammable and combustible materials are strictly prohibited from being placed in the cleaning area to prevent laser fires. At the same time, keep the site clean and avoid debris affecting the cleaning operation.
5. Follow the on/off sequence: When starting up, turn on the power switch, and then turn on the laser switch. When shutting down, first turn off the laser switch, then turn off the power switch.
6. Maintain appropriate cleaning distance: The optimal cleaning distance should be maintained between the cleaning gun and the workpiece to ensure that the laser beam accurately illuminates the area to be cleaned, while preventing accidental injury to the operator.
7. Emergency stop button: The laser cleaning machine is equipped with an emergency stop button to quickly cut off the power in case of an emergency and prevent the accident from escalating.
8. Regular maintenance: The laser cleaning machine needs to be regularly maintained and serviced, including cleaning dirt, replacing consumables, etc., to ensure the normal operation of the equipment and extend its service life.

2.2. Product safety warning label

		
<p>Warning label – Hazard symbol</p>	<p>Explanatory label</p>	<p>Alternative label for Class 4</p>
		
<p>Must be grounded</p>	<p>Electrical Hazard</p>	

2.3. Product nameplate

huizhoushiyunshengshukongshebeiyouxiangongsi

Laser Cleaning Machine

Product name: laser cleaning machine

Model NO: FC-1500

Rating Voltage: 220V

Rating Frequency: 50Hz

Laser Power: 1500W

Rating Power: 3500W

Phase: L+N+PE

Class 4 Laser

Origin: China

Mfg year: 2025.11



Adress:

**huizhoushihuiyuangquqiuchangjiedaoxihucunweipangtianhaichuangxinke
jiyuanAdong5lou 512200 China**

2.4. European Union Agent Information

E-CrossStu GmbH

Felix-Dahn-Str 4

Stuttgart 70597

E-CrossStu@web.de +49 71191222069



Product name :Laser cleaning machine

Model : LCM-YHY

Rated voltage : 220V

Rated current : 15A

Manufacturer : Shenzhen Yuhaiyuan Technology Co., Ltd

Address: Longgang District Yayuan Road Chuangyiyuan

Y1-2-14 Shenzhen China

Made in China

2.5. Compliance to Standards for CE Marking

This product complies with the European Union Harmonized legislation, only complies with the above directives and standards when installed in accordance with the manufacturer's specifications.

The European Community requirements for product safety in the 2006/42/EC Machinery (MD)

This Directive requires that lasers comply with the standard:

EN ISO 12100:2010

EN 60204-1:2018

EN ISO 11553-1:2020/A11:2020

EN ISO 11553-2:2008

EN 60825-1:2014/A11:2021

3. Technical parameters

3.1. Machine parameter details

Laser cleaning machine		
laser power (W)	1500	2000
scanning speed (mm/s)	20000	20000
Laser Frequency (Hz)	5000	5000
Duty cycle%	100	100
scan length (MM)	150	150
scan width (MM)	150	150
Focal length between handheld gun and material (MM)	800	800
Fiber Length	10M	10M
way of working	Continuous	Continuous
Wavelength	1080nm	1080nm
Cooling method	Air Cooling	Air Cooling
Working Environment temperature(°C)	-20°C - 45°C	-20°C - 45°C
Working environment humidity	10%-70% without frost	10%-70% without frost
working voltage	220V 50/60Hz	220V 50/60Hz
Maximum current	15A	15A
Total Power	3500W	5000W

3.2. Laser source parameter details

Power	1500W	2000W
Wavelength	1080±10 nm	1080±10 nm
Output Fiber Core Diameter	20-25µm	20-25µm
Output Cable Length	10m	10m
Output Cable Connector	QBH	QBH
Aiming Beam	Red	Red
Beam Quality	1.2	1.2
Operation Mode	CW or modulation	CW or modulation
Polarization	Random	Random
Power Stability (25°C)	< ±1.5% (2h)	< ±1.5% (2h)
Power Adjustment Scope	10%-100%	10%-100%
Max Modulation Frequency	5kHz	5kHz

3.3. Cleaning efficiency


<p>The following is laboratory data on rust removal and cleaning efficiency, for reference only. Please refer to the actual situation for details.</p>		
Continuous Laser	Single Time Cleaning Thickness	Cleaning Efficiency
1500W	1-2MM	15-20 m ² /hour
2000W	2-3MM	20-25 m ² /hour

4. Installation & Operation

4.1. Installation

(1)After removing the wooden box, check the appearance of the machine for deformation.

(2)Connect the power cord to the electrical box(under 220V, 50/60Hz) (see ③, ④)

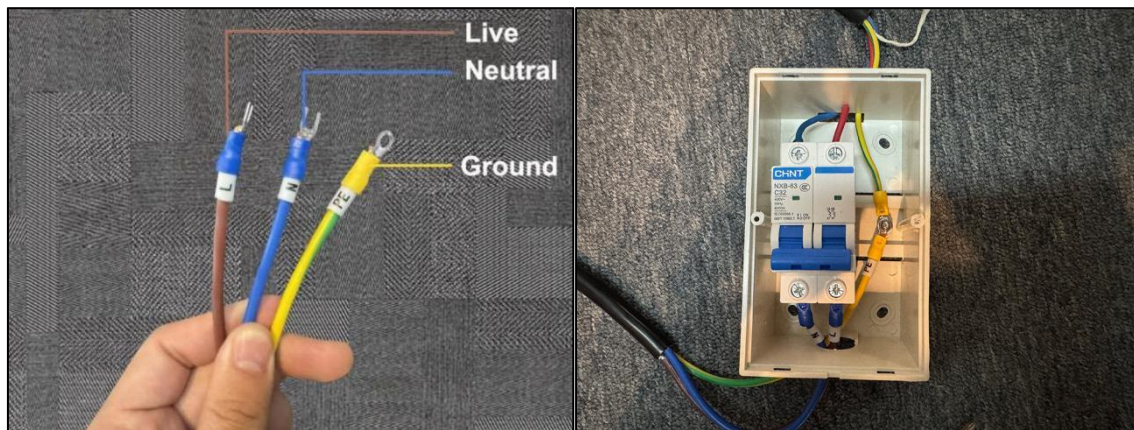

①

②

(3)Connecting the air compressor, wait for a while for the air compressor to stably supply gas (see③,④)



③



④

(4)Turn on the General switch on the back of the machine, then flip the power switch and laser switch on the machine's control panel, the screen lights up, and the machine starts to run.(see ⑤, ⑥)



4.2. Operation

4.2.1. Operation steps

- 1: Turn on the General switch, flip the power switch and laser switch.
- 2: Wear protective equipment such as eye protection and gloves.
- 3: Select the appropriate parameters on the screen.



4: rotate the safety lock of the cleaning head, opens the protective cover.



5: Select indicator red light. (circular or square)

6: Turn on the laser enable.

7: Turn on manual blowing (on represents continuous blowing, off represents venting after pressing the laser trigger)



8: Aim the laser nozzle at the object to be cleaned and adjust the focal length (if an F800 lens is installed, the focal length should be 800mm).

9: Press the laser trigger on the gun head, the laser will shoot out and start cleaning



4.2.2. After cleaning is completed

- 1: Turn off laser enable
- 2: The safety lock of the rotating gun head will close the protective cover
- 3: Turn off the laser switch in sequence; Turn off the power switch and turn off the air switch on the back of the machine

5. System interface





5.1. System interface description



Figure 5.1 Home Page

① [Laser Enable - ON/OFF] : Controls, indicates whether to output [Laser output enable signal].

② [Indicator red light - point/line] : Controls, indicates whether the galvanometer motor swings, adjusts the red light to [●] or [■] without affecting the presence or absence of the red light.

- ③ [Manual Air Blowing] : Control, indicating whether the air valve is opened.
- ④ [ / ] : Indicates whether the gun body [safety lock] is open.
- ⑤ [ / ] : Indicates whether the [Switch button] of the gun body is open.

5.2. Process Page




Figure 5.2 Process Page


- ① [Peak power] : The maximum power output, or processing power, cleaning power.
- ② [Scanning frequency]: The number of periods the focused spot scans back and forth within one second, which affects the precision or fineness of the cleaned surface. It is usually set at 30 to 100Hz.
- ③ [Scan Width] : The theoretical width corresponding to the spot, controlling the spot size. Adjust according to the demand.
- When the laser head is focused at 800, the maximum Scan width is 300mm;
 - When the scanning frequency is 0 to 100Hz, the maximum scanning width is 300mm;
 - At a scanning frequency of 150Hz, the maximum scanning width is around 200mm;
 - When the correction factor is greater than 1.0 and the center offset is not equal to 0, the system will intelligently adjust the scanning width to ensure that the laser work trajectory does not exceed the laser head's light outlet in any case.
- ④ [Duty Cycle, pulse Frequency] : Typically set [duty cycle 100%][pulse frequency 2000]. The equivalent processing power can be changed by adjusting the duty cycle

and pulse frequency according to the characteristics of the laser, but usually no adjustment is made.

⑤ [Endpoint point optimization] : Range -30 to 30 can eliminate the uneven light output at both ends of the cleaning trajectory, with different scanning frequencies corresponding to different optimal parameters. The default is 0. Adjust to the ideal state according to the actual situation.

5.3. Settings Page

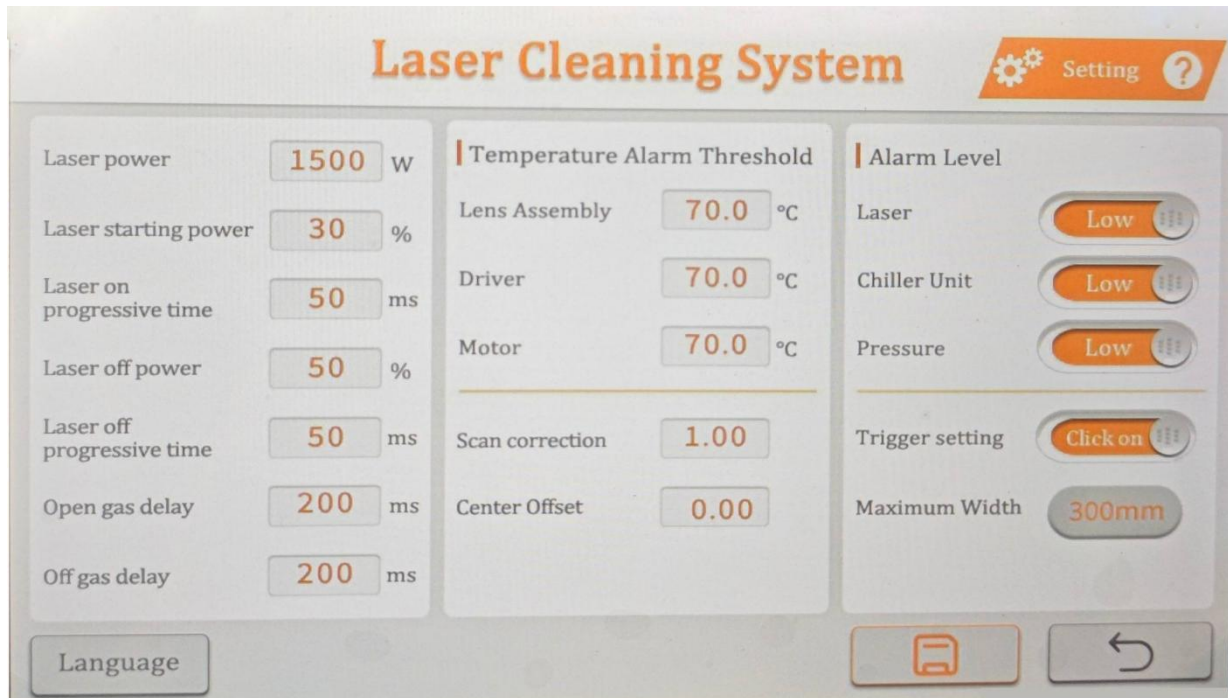

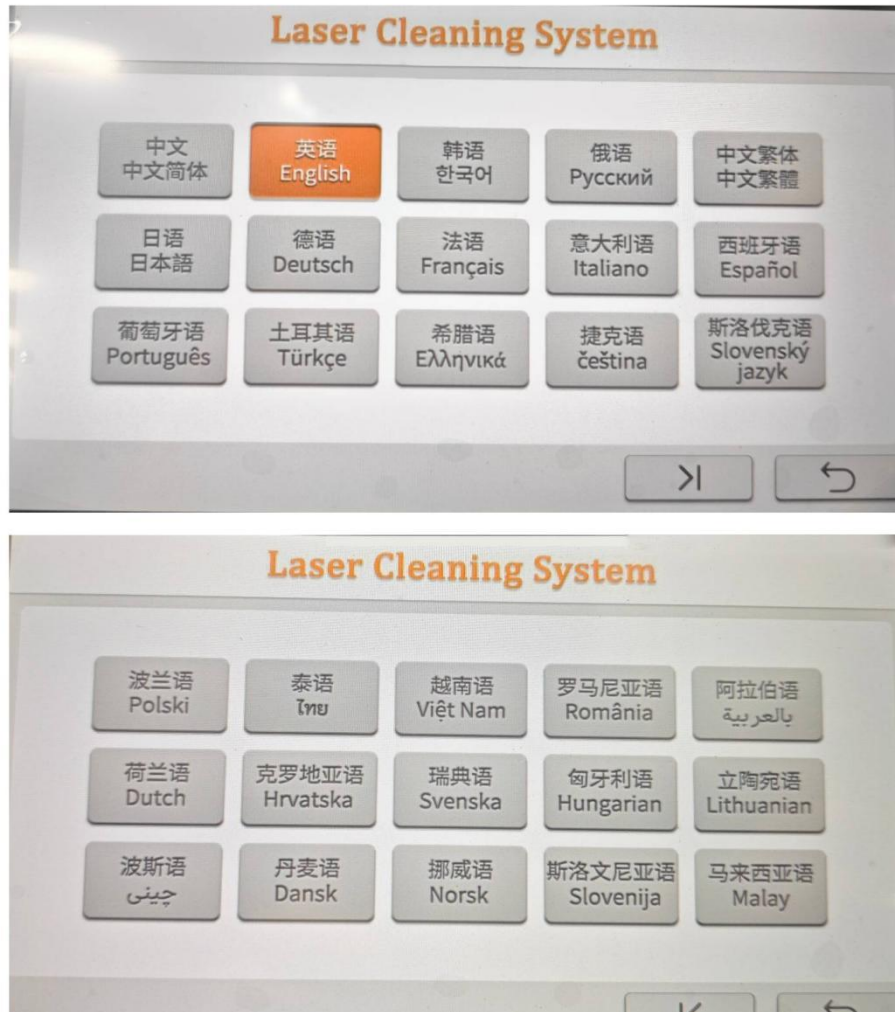

29 languages to choose from

Figure 5.3 Settings Page

The page shown in Figure 5.3 is used to set factory parameters, including the product's power and alarm level, etc.

- ① [Laser Power] : Based on the actual laser.
- ② [Temperature alarm threshold] : Maximum temperature of the lens group 100 ° C, maximum temperature of the driver and motor 80 ° C. When this value is set to 0, no temperature alarm is detected.
- ③ [Alarm Level - High/Low] : Set to low when not in use, depending on the external product Settings.
- ④ [Trigger Settings - Click on/Double-click] : In clean mode, control the trigger mode. It is usually set to [Double-click].
- ⑤ [Open gas delay] : Release air in advance before turning off the light.
- ⑥ [Off gas delay] : After turning off the light, postpone turning off the air.
- ⑦ [Center Offset] : [-] indicates a left shift of the light spot, and [+] indicates a right shift of the light spot. Used to adjust the light spot to be centered. At 800mm focus, the range is -15mm to 15mm.
- ⑧ [Scan Correction] : Range 0.01 to 1.50.

⑨ [Maximum Width] : Switch the maximum scanning width when using different focusing lenses.

⑩ [Laser starting /Laser off Power][Laser on /Laser off progressive time]: As shown in Figure 5.4, [Laser on progressive time] represents the time it takes to increase from [Laser starting power] to [peak power], and [Laser off progressive time] represents the time it takes to decrease from [peak power] to [Laser off power]

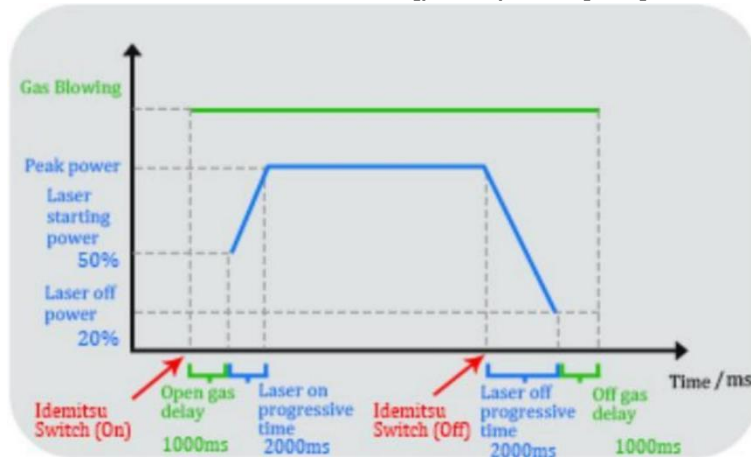


Figure 5.4 Power-to-time relationship

5.4. Monitoring Page



Figure 5.5 Monitoring Page

The page shown in Figure 5.5 shows the actual machine information monitored.

① Among them, [Input] [Output] [power supply] are real-time monitoring signals used to determine whether the product is working properly.

② [Equipment] :

- "Device Authorization" can be clicked to perform the operation and is used for

product encryption.

- [Equipment number][Manufacturer ID][System version][Driver ID][driver version] are simply displayed information to be provided to technicians in after-sales work.
- [Light Time] is the cumulative luminous time of the product.
- ③ [Temperature] :
- [Temperature] is the measured temperature. The system alarms when it exceeds the [Temperature Alarm Threshold] corresponding to the Settings page.

5.5. Diagnostic Page

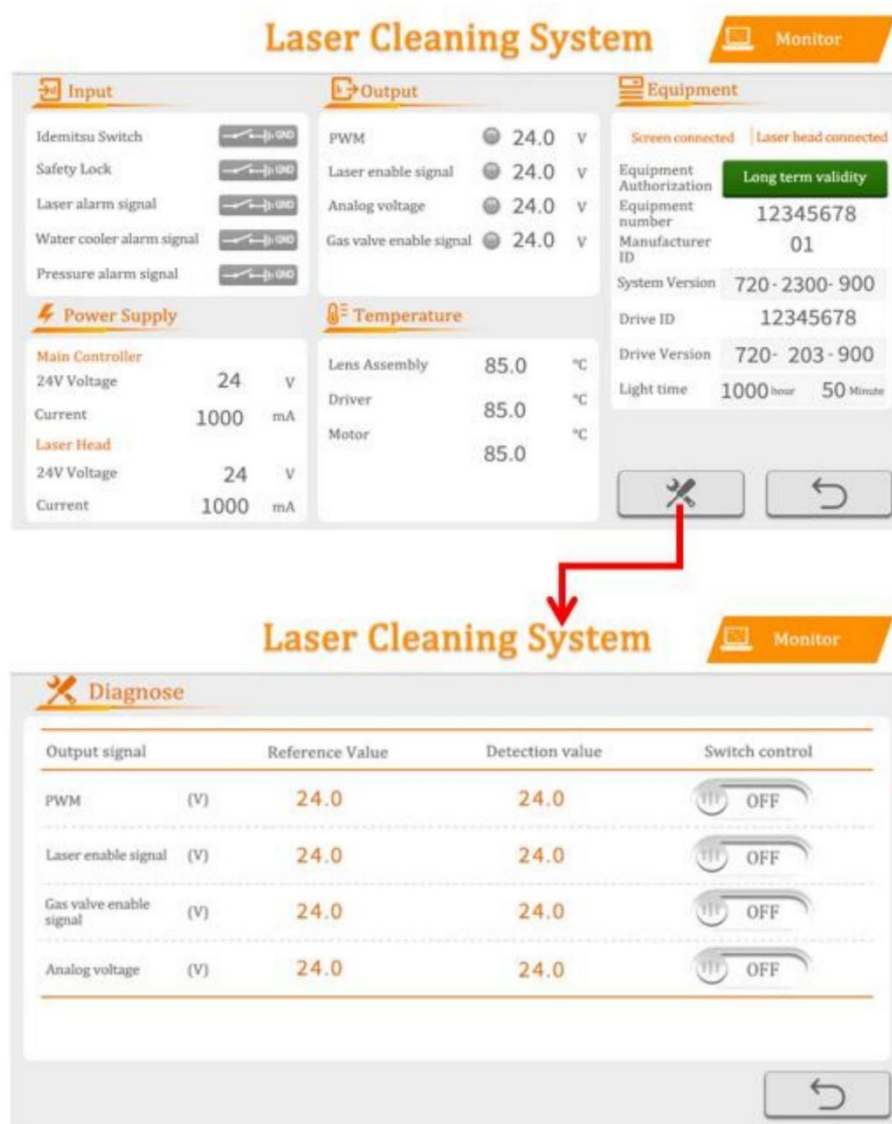


Figure 5.6 Diagnostic Page

The page shown in Figure 5.6 is the diagnostic page for the laser cleaning system. Enter the diagnostic page from the monitoring page.

This mode only shows the detection value of the output signal, which is used to determine whether the output signals of the main control board are normal in a safe

situation. No light is emitted in this mode.

5.6. Alarm Prompt Page

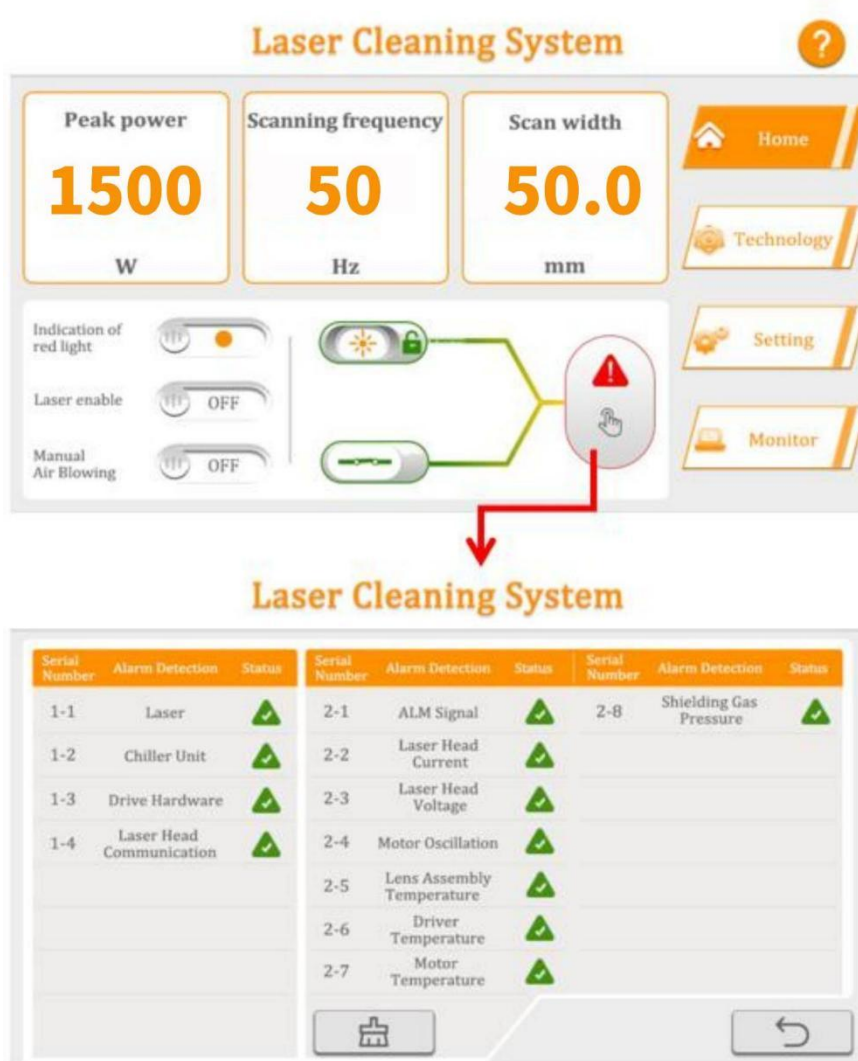


Figure 4.7 Alarm Page

Figure 4.7 shows the alarm display interface.

Enter the alarm details page through the alarm prompt icon on the Home.

When the system malfunctions, a dynamic alarm prompt will appear on the Home. Click the icon to enter the alarm display page to view the anomaly.

- [1-1 to 1-4] When an alarm detects an anomaly, the status icon is [🔴]. When the alarm status is cleared, the icon automatically changes to [🟢].
- [2-1 to 2-8] When an alarm detects an anomaly, the status icon changes to [🔴🔒]. After the alarm status is cleared, the icon does not change color automatically. You need to click the delete button below to clear the alarm.

6. Maintenance and upkeep

6.1. Regular cleaning

- Keep the surface of the equipment clean to prevent dust accumulation
- Wipe the dust and stains on the outer shell of the equipment and the surface of the handheld gun with a clean soft cloth. Check the exterior of all cables and air pipes for any damage or indentations.
- Check whether the protective lens is contaminated or damaged. If there is slight contamination, please gently wipe it clean with anhydrous ethanol and lens cleaning paper. If there are cracks or severe scratches, it should be replaced immediately.

6.2. Cooling system inspection

- Visually inspect whether there is any obvious blockage at the front and rear ventilation ports of the main unit.

6.3. Warning

- Do not use any corrosive chemical solvents to clean the equipment casing.
- When the equipment is not in use for a long time, it should be stored in a dry, dust-free and temperature-appropriate environment, and powered on for operation once a month (about 30 minutes).

6.4. Maintenance of optical components

SUP 32C focusing lens replacement:

<https://youtube.com/shorts/PbjHI8ez5RI>

SUP 32C protective lens replacement:

<https://youtube.com/shorts/OiACfZ0mOEc>

SUP 32C reflective lens replacement:

<https://youtube.com/shorts/EQdPiWVfaDc>

SUP 32C collimating lens replacement:

<https://youtube.com/shorts/HGU10trrJLM>

6.5. Lubrication and Maintenance

- Regularly lubricate moving parts to ensure smooth operation of the equipment.

7. Fault resolution

Problem items	Phenomena	Solutions
Temperature alarm, indicating that all kinds of temperatures are too high	The Home prompts that the temperature of XXX is too high	For general lens temperature alerts, usually first check if the lens is damaged and replace the damaged one. If the lens is normal, you need to directly block this alarm on the Settings page. Set the corresponding lens temperature alarm threshold to 0 on the Settings page and save it.
Chiller/laser/air pressure alarm	The alarm page shows the chiller/laser/air pressure alarm	Level alarm logic: The system will compare the wiring method of the corresponding product with the set level on the Settings page and alarm if they are different. Usually, alarms occur due to incorrect alarm level Settings. Simply change the corresponding alarm level. If an alarm occurs when an alarm signal is connected and the alarm is triggered regardless of how it is set, unplug the alarm signal line and set it to low level.
Screen issue	The screen doesn't light up/the screen doesn't Respond when clicked	If the screen does not light up, make sure the controller is powered on. Check whether the four-core wires of the controller and the screen are connected correctly and whether the 24V voltage at 1 and pin 4 is normal. If clicking doesn't work during normal use, check if the whole machine is overheating. If clicking fails to input, check if the four-core wires of the controller and the screen are properly connected, and if pins 2 and 3 are functioning properly. See 3.2.2 Control box display end. If a new device has no response when clicked, it may be a system version mismatch. Re-flash the program using the SD card. For the specific version, please inquire with our company.
Light output	No light output	Check if there are any alarm prompts on the Home and whether the laser enable is on. Check if the trigger signal and safety lock signal on the monitoring page are displayed in green; Check if the monitoring page's PWM, laser enable, and analog output are functioning properly. If all of the above states are normal, check the laser for abnormal alarms.
	Suddenly stop emitting light while working	Check if the safety lock and other alarms on the monitoring interface are functioning properly.

8. Q&A

1. Q: Why does the laser stop after a few seconds of cleaning after pressing the laser switch?

A: Check that your supply voltage is stable, and if you're using a generator, check to see if you have a voltage regulator.

2. Can this machine clean wood materials?

A: This machine is a continuous laser cleaner, and if it is used to clean wood, the base material will be harmed during cleaning, So it's not recommended for cleaning wood.

3. What do I do when the temperature on the screen flashes a red alarm and the laser stops?

A: Remove the protective lens from the cleaning head, Check for melted dust on protective lenses. If there is dust adhering to the protective lens, replace it with a new lens. If you still can't solve the problem, please contact us.